GO Frameless Balustrade Channels G/ass-Outlet

GO Frameless Channel





Essential Features

- Quick Installation
- Horizontal alignment from two side
- Suitable for 12-21.5mm glass thickness
- Lightweight and stong extruded aluminium
- Fully tested for upto 1.5k/N loading requirements suitable for both domestic and commercial use
- Dry Glazed balustrade system
- Various finishes including stainless steel finish and RAL Colours
- 3 meter Stock Length

Go Frameless balustrade channel is one of the most technically advanced aluminum balustrade systems on the market today. Easily identified by its characteristic triangularhollowed core, which provides an incredibile strength to weight ratio.

Go Frameless channel is able to acheieve up to 1.50kN line load resistance when used with glass panels up to 1200mm high, making it a highly adaptable balustarde system suitable for use as edge protection in both domestic and commercial installations.

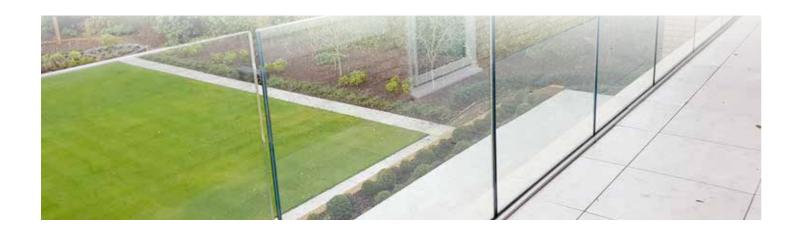

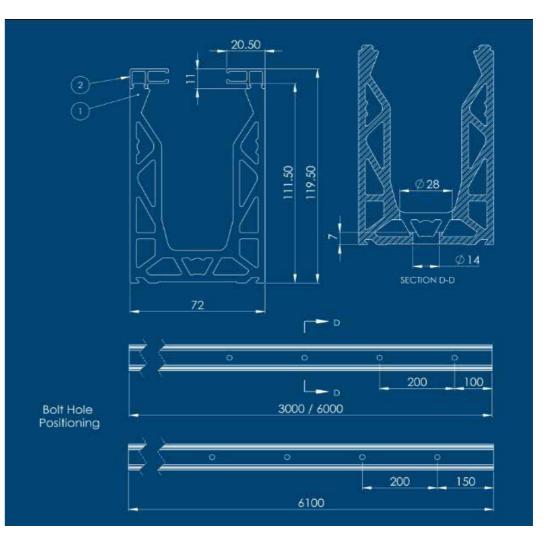



GO Frameless PRO Channel



Essential Features

- Slimline, elegant design
- Horizontal alignment from one side
- Low maintenance
- Suitable for 12-21.5mm glass thickness
- Lightweight and stong extruded aluminium
- Fully tested for upto 1.5k/N loading requirements suitable for both domestic and commercial use
- Various finishes including stainless steel finish with other popular power coated colours on request
- 2.5 meter & 5 meter lengths


Go Frameless PRO balustrade channel has a slimline design with only 60mm width it can acheieve line level load of 1.5kN with appropriate glass selection. Extremely fast and easy installation it can be installed from one side avoiding the need for scaffolding or hoists.

We can cut to your custom size requirements and supply this as a DIY kit or you can have our specialist team install for you in locations within the M25 Area of London.

GO Frameless PRO channels are versitile they can be top mounted, side fixed or recessed into floor.





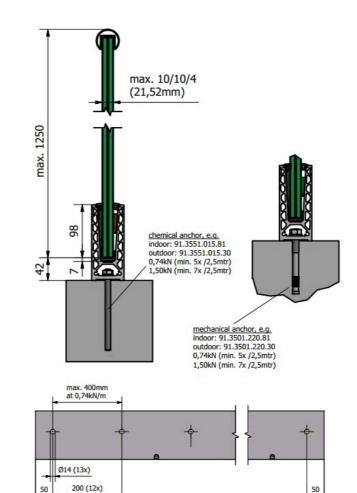

2500

Optional Handrail Guide




NO handrail required




FALL DISTANCE OF 600MM OR MORE

Toughened Glass

Handrail required



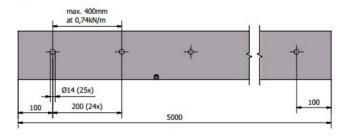



FALL DISTANCE OF 600MM OR MORE* Toughened Laminated Glass

NO handrail required

Glass Outlet Ltd

Rear of 214-216 Alexander Avenue Harrow HA2 9BU T: 0203 802 4295

E: info@glass-outlet.co.uk W: www.glass-outlet.co.uk